


Blind Flanges with reduced thickness similar EN1092-1 type 05 *)

All faces machined, approx. half thickness, mainly for "pressureless" purposes
 Available from stock in material 1.4307 and 1.4571,
 on request with inspection certificate EN 10204/3.1
 *) previous DIN 2527

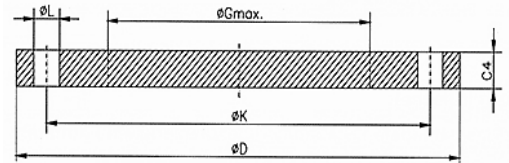

Nennweite DN	Gebohrt nach PN	D	C4	K	L	Anzahl	Gewicht
15	40	95	10	65	14	4	0,51
20	40	105	10	75	14	4	0,63
25	40	115	10	85	14	4	0,78
32	40	140	10	100	18	4	1,13
40	40	150	10	110	18	4	1,30
50	16	165	10	125	18	4	1,60
65*)	16	185	10	145	18	4	2,03
80	16	200	10	160	18	8	2,39
100	16	220	10	180	18	8	2,83
125	16	250	12	210	18	8	4,60
150	16	285	12	240	22	8	5,70
200	10	340	12	295	22	8	8,25
250	10	395	15	350	22	12	13,85
300	10	445	15	400	22	12	17,83
350	10	505	15	460	22	16	23,42
400	10	565	15	515	26	16	28,50
450	10	615	15	565	26	20	33,70
500	10	670	20	620	26	20	53,50
600	10	780	20	725	30	20	71,10

*) DN 65 is usually supplied with 4 drill holes!
 Additional dimensions and other thicknesses on request

