


## Straight Coupling



Serie	PN	Ra	S2	S1	L2	I2	Weight %	Article
LL	100	4	10	9	31	12	1,5	GV-04LL
		6	12	11	32	9	2,0	GV-06LL
		8	14	12	35	12	2,6	GV-08LL
L	250	6	14	12	39	10	3,5	GV-06L
		8	17	14	40	11	5,0	GV-08L
		10	19	17	42	13	6,5	GV-10L
		12	22	19	43	14	8,4	GV-12L
		15	27	24	46	16	13,9	GV-15L
	160	18	32	27	48	16	20,1	GV-18L
		22	36	32	52	20	27,4	GV-22L
	100	28	41	41	54	21	34,1	GV-28L
		35	50	46	63	20	54,3	GV-35L
		42	60	55	66	21	81,9	GV-42L
S	630	6	17	14	45	16	6,1	GV-06S
		8	19	17	47	18	7,9	GV-08S
		10	22	19	49	17	10,8	GV-10S
		12	24	22	51	19	13,3	GV-12S
		14	27	24	57	22	18,4	GV-14S
	400	16	30	27	57	21	22,7	GV-16S
		20	36	32	66	23	36,9	GV-20S
		25	46	41	74	26	69,7	GV-25S
	250	30	50	46	80	27	82,5	GV-30S
		38	60	55	90	29	126,3	GV-38S

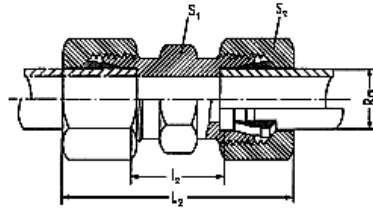