


Adjustable Barrel Tee Coupling

With male stud coupling DIN/ ISO 228



series	PN	Ra	G	i	d3	S2	S1	S3	I3	L2	I2	weight %	article	
LR	250	6	G 1/8 A	8	14	14	12	14	35,0	29	14,0	7,7	FFL 6 G 1/8A	
		8	G 1/4 A	12	18	17	12	19	37,5	29	14,0	10,8	FFL 8 G 1/4A	
		10	G 1/4 A	12	18	19	14	19	40,0	30	15,0	12,9	FFL 10 G 1/4A	
		12	G 3/8 A	12	22	22	17	22	42,0	32	17,0	17,4	FFL 12 G 3/8A	
		15	G 1/2 A	14	26	27	19	27	46,5	36	21,0	29,6	FFL 15 G 1/2A	
	160	18	G 1/2 A	14	26	32	24	27	50,0	40	23,5	40,2	FFL 18 G 1/2A	
		22	G 3/4 A	16	32	36	27	32	55,0	44	27,5	58,2	FFL 22 G 3/4A	
		100	28	G 1 A	18	39	41	36	41	59,0	47	30,5	77,0	FFL 28 G 1A
			35	G 1 1/4 A	20	49	50	41	50	69,0	56	34,5	115,1	FFL 35 G 1 1/4A
			42	G 1 1/2 A	22	55	60	50	55	75,0	63	40,0	155,3	FFL 42 G 1 1/2A
SR	630	6	G 1/4 A	12	18	17	12	19	40,0	31	16,0	12,7	FFS 6 G 1/4A	
		8	G 1/4 A	12	18	19	14	19	43,0	32	17,0	16,0	FFS 8 G 1/4A	
		10	G 3/8 A	12	22	22	17	22	45,0	34	17,5	22,3	FFS 10 G 3/8A	
		12	G 3/8 A	12	22	24	17	22	48,0	38	21,5	26,5	FFS 12 G 3/8A	
		14	G 1/2 A	14	26	27	19	27	54,0	40	22,0	37,7	FFS 14 G 1/2A	
	400	16	G 1/2 A	14	26	30	24	27	54,0	43	24,5	46,2	FFS 16 G 1/2A	
		20	G 3/4 A	16	32	36	27	32	65,0	48	26,5	71,8	FFS 20 G 3/4A	
		25	G 1 A	18	39	46	36	41	73,0	54	30,0	137,7	FFS 25 G 1A	
		250	30	G 1 1/4 A	20	49	50	41	50	79,0	62	35,5	179,6	FFS 30 G 1 1/4A
			38	G 1 1/2 A	22	55	60	50	55	89,0	72	41,0	251,0	FFS 38 G 1 1/2A

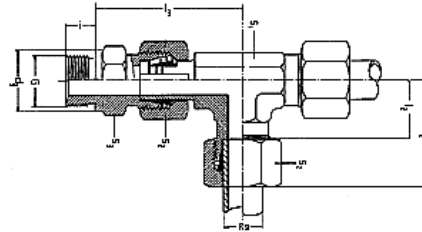