


Non Return Valve

Inlet and outlet pipe connection
 Opening pressure 0,5 bar
 Outer opening pressures
 (01,0/2,0/3,0 bar) on request.



series	PN	Ra	S2	S1	S3	L2	l2	weight %	article	
L	250	6	14	17	17	58,0	29,0	6,9	RV-6L	
		8	17	17	19	59,0	30,0	8,9	RV-8L	
		10	19	22	24	69,5	40,5	14,5	RV-10L	
		12	22	27	30	72,5	43,5	22,3	RV-12L	
		15	27	27	30	77,5	47,5	27,9	RV-15L	
		160	18	32	36	36	83,5	51,5	42,3	RV-18L
		22	36	41	46	93,5	61,5	64,5	RV-22L	
100	28	41	50	55	104,5	71,5	91,7	RV-28L		
		35	50	60	60	111,5	68,5	134,0	RV-35L	
		42	60	80	90	128,0	83,0	199,0	RV-42L	
		S	630	6	17	19	19	63,5	34,5	10,9
8	19	19		22	63,5	34,5	11,8	RV-8S		
10	22	24		27	72,5	40,5	18,6	RV-10S		
12	24	27		30	74,5	42,5	22,5	RV-12S		
14	27	27		32	82,5	47,5	31,3	RV-14S		
400	16	30		32	36	86,5	50,5	42,7	RV-16S	
20	36	41		46	97,5	54,5	74,1	RV-20S		
250	30	46	46	50	106,5	58,5	108,2	RV-25S		
		50	55	60	122,5	69,5	165,1	RV-30S		
		38	60	65	70	136,5	75,5	235,4	RV-38S	

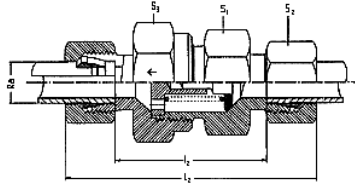