


## Non Return Valve

Flow direction from male stud  
 Thread : DIN/ISO 228  
 Whitworth, Form E, DIN 3852 part 2  
 Viton seal on male stud



series	PN	Ra	G	i	d3	S2	S1	S3	L2	l2	DN	LW	weight %	article
L	250	6	G 1/8 A	8	14	14	17	17	42,5	28,0	4	4	5,9	RVZE-6LR
		8	G 1/4 A	12	19	17	19	19	44,5	30,0	6	6	8,1	RVZE-8LR
		10	G 1/4 A	12	19	19	22	24	50,0	38,5	8	7	12,5	RVZE-10LR
		12	G 3/8 A	12	22	22	27	30	57,0	42,5	10	9	20,3	RVZE-12LR
		15	G 1/2 A	14	27	27	27	30	60,5	45,5	12	11	24,6	RVZE-15LR
	160	18	G 1/2 A	14	27	32	36	36	65,0	49,0	16	14	35,8	RVZE-18LR
		22	G 3/4 A	16	32	36	41	46	71,0	55,0	20	18	52,7	RVZE-22LR
	100	28	G 1 A	18	40	41	50	55	81,5	65,0	25	23	79,4	RVZE-28LR
		35	G 1 1/4 A	20	50	50	60	60	90,5	69,0	32	30	114,4	RVZE-35LR
		42	G 1 1/2 A	22	55	60	80	90	103,5	81,0	32	36	177,0	RVZE-42LR
S	630	6	G 1/4 A	12	19	17	19	19	46,0	31,5	3	4	9,1	RVZE-6SR
		8	G 1/4 A	12	19	19	19	22	46,0	31,5	4	5	9,7	RVZE-8SR
		10	G 3/8 A	12	22	22	24	27	54,0	38,0	6	7	15,9	RVZE-10SR
		12	G 3/8 A	12	22	24	27	30	57,0	41,0	8	8	19,2	RVZE-12SR
		14	G 1/2 A	14	27	27	27	32	62,0	44,5	10	10	26,9	RVZE-14SR
	400	16	G 1/2 A	14	27	30	32	36	66,0	48,0	12	12	35,9	RVZE-16SR
		20	G 3/4 A	16	32	36	41	46	73,5	52,0	16	16	63,6	RVZE-20SR
		25	G 1 A	18	40	46	46	50	78,5	54,5	20	20	85,6	RVZE-25SR
	250	30	G 1 1/4 A	20	50	50	55	60	90,5	64,0	25	25	140,6	RVZE-30SR
		38	G 1 1/2 A	22	55	60	65	70	100	69,5	32	32	195,0	RVZE-38SR

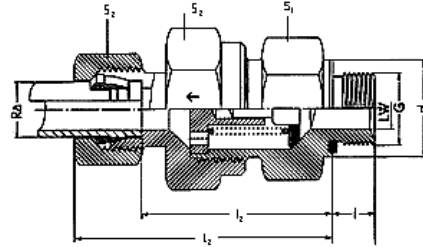