


Non Return Valve

Flow direction to male stud
 Thread : DIN/ISO 228
 Whitworth, Form E, DIN 3852 part 2
 Viton seal on male stud



series	PN	Ra	G	i	d3	S2	S1	S3	L2	l2	DN	LW	weight %	article
L	250	6	G 1/8 A	8	14	14	17	17	41,0	26,5	4	4	5,6	RVZA-6LR
		8	G 1/4 A	12	19	17	19	19	43,0	28,5	6	6	7,7	RVZA-8LR
		10	G 1/4 A	12	19	19	22	24	53,0	38,5	8	7	12,4	RVZA-10LR
		12	G 3/8 A	12	22	22	27	30	55,0	40,5	10	9	19,0	RVZA-12LR
		15	G 1/2 A	14	27	27	27	30	57,5	42,5	12	11	23,0	RVZA-15LR
	160	18	G 1/2 A	14	27	32	36	36	64,0	48,0	16	14	34,3	RVZA-18LR
		22	G 3/4 A	16	32	36	41	46	72,0	56,0	20	18	52,4	RVZA-22LR
	100	28	G 1 A	18	40	41	50	55	80,5	64,0	25	23	77,5	RVZA-28LR
		35	G 1 1/4 A	20	50	50	60	60	85,5	64,0	32	30	117,4	RVZA-35LR
		42	G 1 1/2 A	22	55	60	80	90	103,5	81,0	32	36	180,0	RVZA-42LR
S	630	6	G 1/4 A	12	19	17	19	19	46,0	31,5	3	4	9,0	RVZA-6SR
		8	G 1/4 A	12	19	19	19	22	46,0	31,5	4	5	9,6	RVZA-8SR
		10	G 3/8 A	12	22	22	24	27	54,0	38,0	6	7	15,9	RVZA-10SR
		12	G 3/8 A	12	22	24	27	30	57,0	41,0	8	8	19,0	RVZA-12SR
		14	G 1/2 A	14	27	27	27	32	61,0	43,5	10	10	26,9	RVZA-14SR
	400	16	G 1/2 A	14	27	30	32	36	64,0	46,0	12	12	34,5	RVZA-16SR
		20	G 3/4 A	16	32	36	41	46	71,5	50,0	16	16	60,7	RVZA-20SR
		25	G 1 A	18	40	46	46	50	78,5	54,5	20	20	86,6	RVZA-25SR
	250	30	G 1 1/4 A	20	50	50	55	60	90,5	64,0	25	25	139,9	RVZA-30SR
		38	G 1 1/2 A	22	55	60	65	70	102	71,5	32	32	196,8	RVZA-38SR

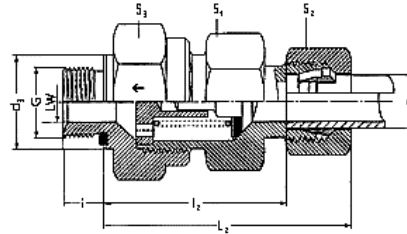