


### Non Return Valve

Flow direction to male stud  
Thread : DIN 13  
Metric, Form E, DIN 3852 part 1  
Viton seal on male stud



series	PN	Ra	G	i	d3	S2	S1	S3	L2	l2	DN	LW	weight %	article
L	250	6	M 10x1	8	14	14	17	17	41,0	26,5	4	4	5,6	RVZA-6LM
		8	M 12x1,5	12	17	17	17	19	43,0	28,5	6	6	7,7	RVZA-8LM
		10	M 14x1,5	12	19	19	22	24	53,0	38,5	8	7	12,4	RVZA-10LM
		12	M 16x1,5	12	22	22	27	30	55,0	40,5	10	9	19,0	RVZA-12LM
		15	M 18x1,5	12	24	27	27	30	57,5	42,5	12	11	23,0	RVZA-15LM
	160	18	M 22x1,5	14	27	32	36	36	64,0	48,0	16	14	34,4	RVZA-18LM
		22	M 26x1,5	16	32	36	41	46	72,0	56,0	20	18	52,4	RVZA-22LM
	100	28	M 33x2	18	40	41	50	55	80,5	64,0	25	23	77,5	RVZA-28LM
		35	M 42x2	20	50	50	60	60	85,5	64,0	32	30	117,4	RVZA-35LM
		42	M 48x2	22	55	60	80	90	103,5	81,0	32	36	183,0	RVZA-42LM
S	630	6	M 12x1,5	12	17	17	19	19	46,0	31,5	3	4	9,0	RVZA-6SM
		8	M 14x1,5	12	19	19	19	22	46,0	31,5	4	5	9,6	RVZA-8SM
		10	M 16x1,5	12	22	22	24	27	54,0	38,0	6	7	15,9	RVZA-10SM
		12	M 18x1,5	12	24	24	27	30	57,0	41,0	8	8	19,0	RVZA-12SM
		14	M 20x1,5	14	26	27	27	32	61,0	43,5	10	10	26,9	RVZA-14SM
	400	16	M 22x1,5	14	27	30	32	36	64,0	46,0	12	12	34,5	RVZA-16SM
		20	M 27x2	16	32	36	41	46	71,5	50,0	16	16	60,7	RVZA-20SM
		25	M 33x2	18	40	46	46	50	78,5	54,5	20	20	85,6	RVZA-25SM
	250	30	M 42x2	20	50	50	55	60	90,5	64,0	25	25	139,7	RVZA-30SM
		38	M 48x2	22	55	60	65	70	102,0	71,5	32	32	196,8	RVZA-38SM

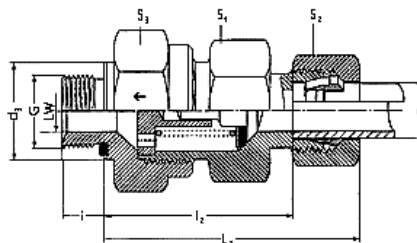