


Plug

With outside hexagon cylindric thread
DIN/ISO 228
Form B Din 3852



Thread d	D	L	a	S	article
G 1/8 A	14	8	1,5	19	VS G 1/8A
G 1/4 A	18	12	2,0	19	VS G 1/4A
G 3/8 A	22	12	2,5	22	VS G 3/8A
G 1/2 A	26	14	3,0	27	VS G 1/2A
G 3/4 A	32	16	3,0	32	VS G 3/4A
G 1 A	39	18	3,0	41	VS G 1A
G 1 1/8 A	44	20	3,0	46	VS G 1 1/8A
G 1 1/4 A	49	20	3,0	50	VS G 1 1/4A
G 1 1/2 A	55	22	3,0	55	VS G 1 1/2A
G 1/8 A	14	8	1,5	19	VS G 1/8A

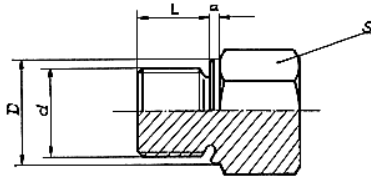