


**Blind flanges Aluminium similar DIN 2527, PN10 / EN 1092-1 Typ 05**

Gk AISi 12, drilled to PN 10  
Surface blank or plastic coated

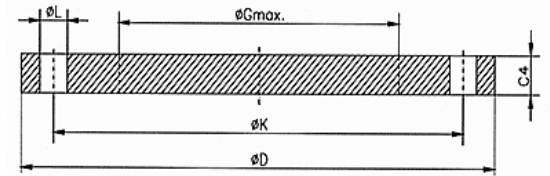

DN	D	C4	K	L	Qty.	weight
15	95	12	65	14	4	0,21
20	105	12	75	14	4	0,26
25	115	12	85	14	4	0,32
32	140	16	100	18	4	0,62
40	150	16	110	18	4	0,72
50	165	16	125	18	4	0,88
65*)	185	16	145	18	4	1,26
80	200	18	160	18	8	1,50
100	220	18	180	18	8	1,75
125	250	18	210	18	8	2,37
150	285	18	240	23	8	2,93
200	340	18	295	23	8	4,26
250	395	20	350	23	12	6,35
300	445	22	400	23	12	8,99
350	505	22	460	23	16	11,82
400	565	25	515	27	16	16,34
450	615	25	565	27	20	19,35
500	670	28	620	27	20	25,97
600	780	30	725	30	20	37,6

\*) DN 65 is usually supplied with 4 bolt holes!  
On request: blind flanges in PN6, PN 16 and plated with stainless steel

