


Collar DIN 2642, PN10 (similar EN 1092-1 Typ 37)

Up to DN 250 cold drawn from plate,
larger dimensions welded from profiles, plain ends, pickled or sand blasted.
Available vomn stock in material 1.4307 and 1.4571. On request with
inspection certificate EN 10204/3.1

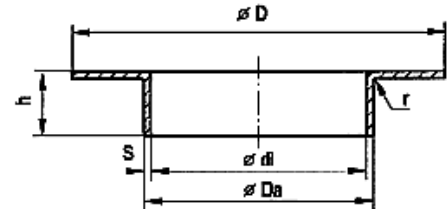

DN	pipe connection		thickness raw material.	D	h	r	weight
	ISO Da x s	metr. Di x s					
10	17,2 x 2,0		2,5	40	7	3	0,02
		10 x 2,0	2,5	40	7	3	0,02
15	21,3 x 2,0		2,5	45	9	3	0,03
		15 x 2,0	2,5	45	8	3	0,03
20	26,9 x 2,0		2,5	58	11	3	0,05
		20 x 2,0	2,5	58	10	3	0,05
25	33,7 x 2,0		2,5	68	12	4	0,07
		25 x 2,0	2,5	68	11	4	0,07
32	42,4 x 2,0		2,5	78	14	4	0,09
		32 x 2,0	2,5	78	11	4	0,09
40	48,3 x 2,0		2,5	88	16	4	0,11
		40 x 2,0	2,5	88	16	4	0,11
50	60,3 x 2,0		2,5	102	20	5	0,15
		50 x 2,0	2,5	102	18	5	0,15
65	76,1 x 2,0		2,5	122	23	5	0,22
		65 x 2,0	2,5	122	22	5	0,22
80	88,9 x 2,0		2,5	138	23	5	0,25
		80 x 2,0	2,5	138	22	5	0,25
100	114,3 x 2,0		2,5	158	28	5	0,35
		100 x 2,0	2,5	158	26	5	0,35
125	139,7 x 2,0		2,5	188	30	5	0,45
		125 x 2,0	2,5	188	28	5	0,45
150	168,3 x 3,0		3,0	212	30	5	0,60
		150 x 3,0	3,0	212	30	5	0,60
200	219,1 x 3,0		3,0	268	30	5	0,85
		200 x 3,0	3,0	268	25	5	0,85
250	273,0 x 3,0		3,0	320	30	5	1,08
		250 x 3,0	3,0	320	26	5	1,08
300	323,9 x 3,0		3,0	370	32	5	1,46
		300 x 3,0	3,0	370	35	5	1,46
350	355,6 x 3,0		3,0	430	35	6	1,86
		350 x 3,0	3,0	430	35	6	1,86
400	406,4 x 3,0		3,0	482	40	6	2,22
		400 x 3,0	3,0	482	40	6	2,22
450	457,0 x 3,0		3,0	535	45	6	2,54
		450 x 3,0	3,0	535	45	6	2,54
500	508,0 x 3,0		3,0	585	45	6	2,90
		500 x 3,0	3,0	585	45	6	2,90
600	609,4 x 4,0		4,0	685	45	7	4,72

Different dimensions and collars acc. DIN 2641, PN6 on request.

